

Serial control RS-232 / RS-485.





100 mm high digits. Industrial environment Readable from up to 50m 1 o 2 displaying sides.

Application field

It shows data of internal registers from a PLC.

It displays data created from a PC.

It displays in big letters the lecture of voltmeter, temperature regulators, process controllers, etc.

It displays data of users equipment based on microprocessors with RS-232 and RS-485 serial line, such as large scales, electromedecine equipments, etc.

Connection to Modbus (soon with other buses).

If Host-Link Omron protocol is used, the RS-422 option will be necessary.


Colour option

Available for models DN-109 and DN-119. It lets you to choose the display colour depending on the input value. The valid colours are: Red, green and yellow.



Option to display the measures units

Several measure units can be permanently displayed: Kg, Tm, °C, mV, m/s, l/s, or any other unit, as the consumer desires, up to three characters.

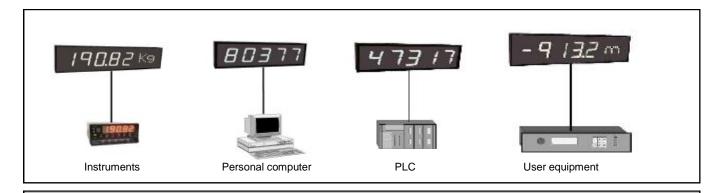

SERIAL LINE INTERFACE CONFIGURATION

The displays includes two push bottoms to configure the protocol and the transmission characteristics: baud rate, parity, data bits and stop bits.


General specifications

Numeric display Height	100mm				
Unity of mesures text Height (optional)	60mm				
Viewing	50 meters				
Characters distribution	0 a 9, A,b,C,c,d,E,F,H,h,i,J,L,n,o,P,r,U,u [espace] and [point]				
Maximum environmental lighting	1000 lux				
Maximum environmental lighting. Models (eh)	Outdoor				
Colour. Red/Green/Yellow	Applicable				
Power supply	100VAC to 240VAC 50/60Hz Option 24VCC				
N⁰ of displaying sides	One or two				
Вох	Aluminum extruded				
Assembly by lateral supports	Which fix to a surface or let in hung				
Protocols	Ditel, ISO1745, Modbus, ASCII, Host-Link, S7-200,others				

Dimensions

Dígits	3	4	5	6	7	8	9	10
N-119 Height = 175mm Depth = 120mm								
Width in mm	324	414	504	594	684	774	864	954
Width + Option text in mm	504	594	684	774	864	954	1044	1134

Reference composition

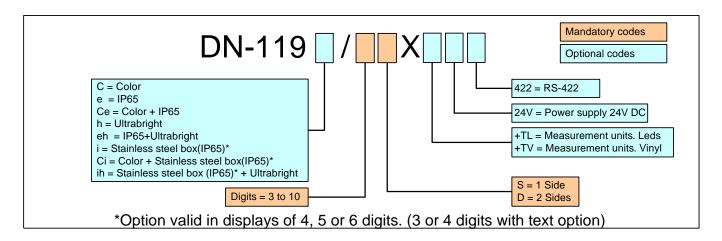

EXAMPLES:

DN119/4DX

4 digits, DN-119 series display, two sides.

DN119/5SX+TV "m/m"

5 digits, DN-119 series display, one side.

Text option: "m/m" in vinyl

DN119Ce/6SX

6 Digits, DN-119 series, one side. Red/green/yellow colour display digits. Protection degree IP65.



Tel. +34 933 394 758 Fax +34 934 903 145

Email: dtl@ditel.es; web: www.ditel.es